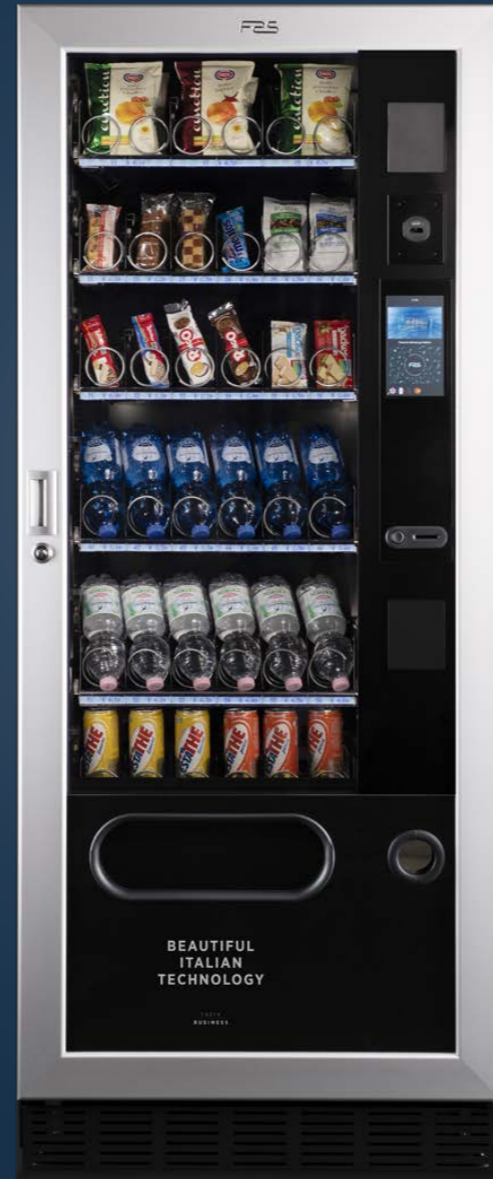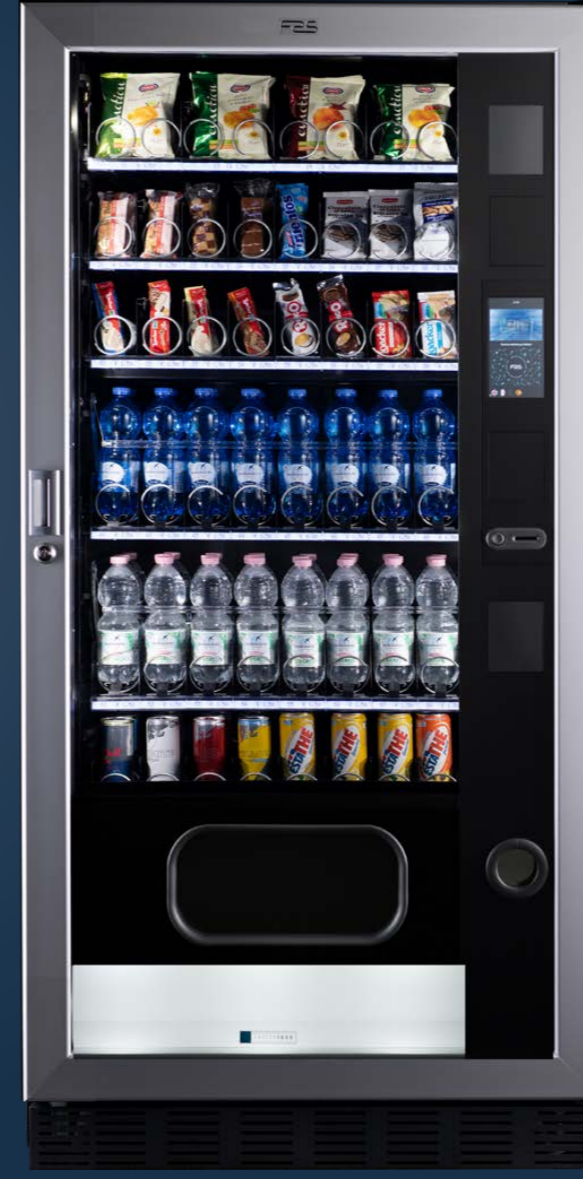# FaS

Fas
COLD
750-900-1050

Fas **Cold**

The unmistakable Fas spiral line specially designed for vending machine operators.

The Fas Cold line meets all market requirements with its wide range and numerous setups. Be inspired by the different combinations and choose the vending machine that best suits your needs.

750mm

900mm

1050mm

3 **Dimensions**

Depending on individual needs, it is possible to choose between 3 different sizes: 750, 900 and 1050 mm

4 **Setups**

Choose the one that best suits your location

Line
750
Business
Advanced
Excellence

Line
900
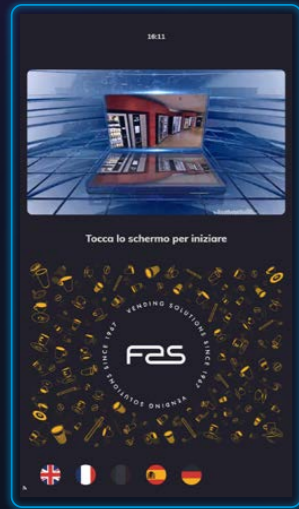**Advanced**
Excellence
Pro

Line
1050
Advanced
Excellence
Pro

Connectivity

👆 Touch Technology

With the possibility of customisable slideshows and media

The entire Fas Cold line is equipped with touch screen technology that makes the machines easy and intuitive to use for both the end user and the technician, facilitated by the iconographic menu during programming. The entire Cold Fas line can be connected to the network via Wi-Fi or an internet dongle.

Wide viewing angle

The technology used allows a wide viewing angle even in sunlight.

Customisable slideshow

Possibility to display slideshows or promotional videos on the stand-by screen as well as during dispensing.

Icon programming

Icon programming simplifies the operation of the machine, making everything extremely intuitive.

☁ Fas Cloud⁺

The platform for the complete control of your vending machines

Fas vending machines, thanks to their advanced technology, can be easily connected to Fas Cloud+, which allows a complete remote control of the machines with a significant reduction in operating costs.

Main Functions:

• Control for machine groups

• Alarm and malfunction notifications

• Error reset

• Updating prices and promotions

• Remote dispensing

• Software and firmware updates

• Cash flow control

• Product underwriting notice

• Geolocation

• Remote machine restart

💳 Digital payment systems

Satispay   **PayPall**

Thanks to partnerships with Satispay and PayPal, Fas vending machines integrate 2 digital payment systems as standard into their software, without the need to install additional hardware inside the machine.

📶 Integrated Wi-Fi

The Wi-Fi 2.0 connection ensures a stable connection to the internet network for managing all dedicated online services. The connection can be established via DONGLE internet key as well.
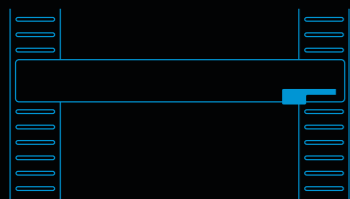
Hardware

CO$_2$ Refrigeration unit

The use of CO2 in the Fas refrigeration unit ensures the lowest possible environmental impact (GWP=1), as well as being completely safe as it is not a flammable gas. In addition, the refrigeration unit is controlled by an inverter that guarantees reduced energy consumption.

Fas has implemented this refrigeration system on its entire range, allowing backward compatibility with models produced from 2004 onwards.

green power | CO$_2$ GAS REFRIGERATION

For more information
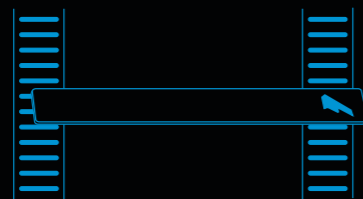**Watch the video**

easy Click

The patented system that allows quick reconfiguration of drawers

The patented Fas quick repositioning system makes it much easier to change the configuration of the vending machine without the need to use tools and speeds up the whole operation.

1 Release

Open the flaps at both ends of EasyClick to remove the bar.

2 Move

Choose the most suitable position for your new configuration by moving EasyClick inch by inch.

3 Lock

Close the flaps to secure the line to the body of the machine and that's it!

Slide IN ↑ Slide OUT ↓

Quick extraction of the refrigeration unit

The entire Fas refrigeration unit is located in the lower part of the vending machine and is easy to remove, so as to significantly speed up routine maintenance operations.

For more information
Watch the video

For more information
Watch the video

€ 0.0

Drawer
Display

They increase visibility,
increasing the sales volume

Advantages

Programmable: a few easy steps
to change product prices;   •

Possibility to display custom promotions   •
and prices dynamically, drawing attention
to specific products;

Possibility to change prices   •
and configure new promotions
remotely with Fas Cloud+.

Pre Cooling **Area**

Large product pre-cooling area.

A large quantity of products (such as cans and bottles)
can be placed in this stock area so that, when next
loaded, they are already at the ideal temperature.

Lateral
Air circulation

The Fas patented lateral air circulation allows an optimal
distribution of the cold air inside the cabinet, preventing
condensation on the window.

Foamed
Cabinet

Since the early 1980s, the insulation of Fas
vending machines is composed of polyurethane
foam that drastically reduces heat loss, to ensure
maximum energy efficiency.

Fas 750

Automatic vending machines with a maximum capacity of 6 selections for each drawer, compact dimensions and available in 2 heights: 170 (750 Business) and 183 mm (750 Advanced e Excellence).

Fas 900

Automatic vending machine with a capacity of 8 selections for each drawer, up to a maximum of 56 selections in total. Available in Advanced, Excellence and Pro setups.

Fas 1050

Automatic vending machine with 10 selections for each drawer, up to a maximum of 70 selections in total. Available in Advanced, Excellence and Pro setups.
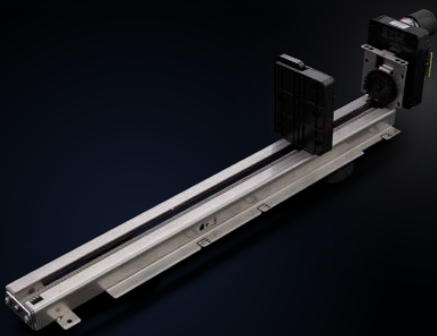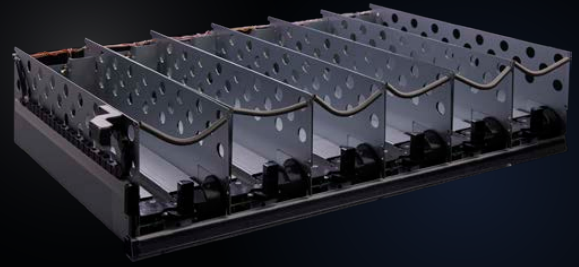
Setups Specifications

	750 Business	750 Advanced	750 Excellence
Additional	Up to 36	Up to 42	Up to 42
Tablet	7"	7"	7"
Collection pocket	Standard	Standard	Maggiorata
Aesthetic finishes	Anodized grey and black	Anodized grey and black	Anodized grey and black
Minimum temperature	+3°	+3°	+3°
Burglar protection profiles	No	No	No
Dimensions (mm)	1700x750x790	1830x750x790	1830x750x790
Footprint with the door open (mm)	1470	1470	1470
Weight (kg)	230	236	236
Protocol	MDB – Executive – BDV	MDB – Executive – BDV	MDB – Executive – BDV
Alimentación V/Hz	230/50-60	230/50-60	230/50-60
Energy class*	D	D	D

Setups Specifications

	900 Advanced	900 Excellence	900 Pro
Additional	Up to 56	Up to 56	Up to 56
Tablet	7"	7"	10.1"
Collection pocket	Standard	Maggiorata	Maggiorata
Aesthetic finishes	Anodized grey and black	Anodized grey and black	Graphite grey and black
Minimum temperature	+3°	+3°	+3°
Burglar protection profiles	No	No	yes
Dimensions (mm)	1830x900x790	1830x900x790	1830x910x790
Footprint with the door open (mm)	1660	1660	1660
Weight (kg)	265	274	274
Protocol	MDB – Executive – BDV	MDB – Executive – BDV	MDB – Executive – BDV
Alimentación V/Hz	230/50-60	230/50-60	230/50-60
Energy class*	C	D	D

Setups Specifications

	1050 Advanced	1050 Excellence	1050 Pro
Additional	Up to 70	Up to 70	Up to 70
Tablet	7"	7"	10.1"
Collection pocket	Standard	Maggiorata	Maggiorata
Aesthetic finishes	Anodized grey and black	Anodized grey and black	Graphite grey and black
Minimum temperature	+3°	+3°	+3°
Burglar protection profiles	No	No	yes
Dimensions (mm)	1830x1050x790	1830x1050x790	1830x1060x790
Footprint with the door open (mm)	1810	1810	1810
Weight (kg)	324	340	340
Protocol	MDB – Executive – BDV	MDB – Executive – BDV	MDB – Executive – BDV
Alimentación V/Hz	230/50-60	230/50-60	230/50-60
Energy class*	C	D	D

*Energy classes may vary depending on the configuration of the vending machine.

Accessories

HCB **Drawer**

Available for models 900 and 1050 in all their configurations, the HCB (Hight Capacity Bottles) drawer increases the load capacity of a single drawer for bottles or cans, increasing it by +50% and +70% respectively compared to a standard drawer (percentages relative to model 1050).
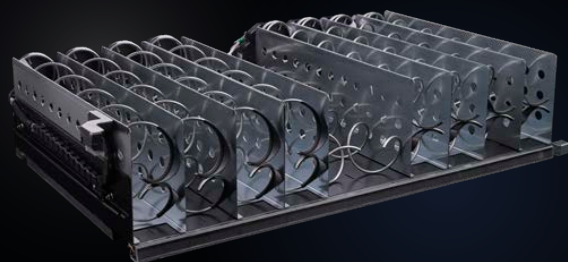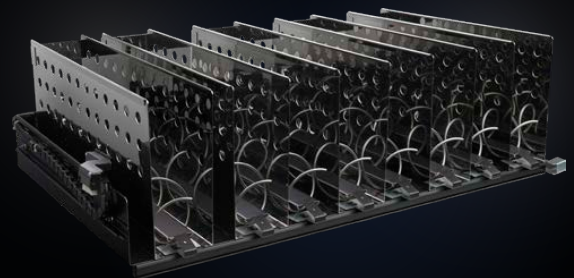
Pusher **LT**

Depending on the products, each individual selection can be equipped with a pusher instead of a spiral.

Sandwich **Drawer**

Special drawer for the dispensing of sandwiches (or milk bottles), whose format requires higher side-panels, product support and specific width selections.

Baguette **Drawer**

Drawer with vertically positioned double spirals that can optimally dispense baguettes and other products with a narrow and elongated format.

FAS international S.r.l.
Via lago di vico, 60
36015 Schio (vi) italy

T +39 0445 502011
E info@fas.it

WWW.FAS.IT